


Wall: Timber construction

Windtight and rainproof on the outside




Facade membrane overlap



For closed facades:

- Align Wigluv centrally along the overlap and secure in place
- Apply it without tension and creases and press on **firmly**

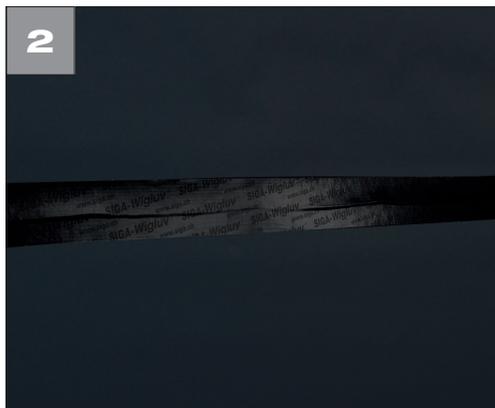

For open facades:

- Facade membrane overlap sealed windtight using Wigluv black
- Max. distance of open timber facade ≤ 20 mm

For closed facades:



Wigluv® 60

P. 120

For open facades:



Wigluv® black

P. 123